


# 1N5820 THRU 1N5822

## SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 40 Volts      Forward Current - 3.0 Amperes

### DO-201AD

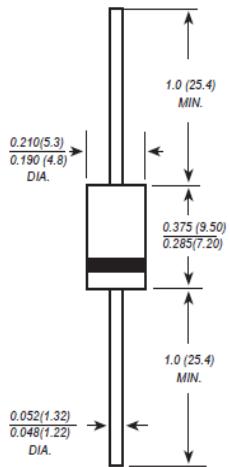

Dimensions in inches and (millimeters)

### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Guardring for overvoltage protection
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length,  
5 lbs. (2.3kg) tension

### MECHANICAL DATA

**Case:** JEDEC DO-201AD molded plastic body

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.04 ounce, 1.10 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for current capacitive load derate by 20%.

	SYMBOLS	1N5820	1N5821	1N5822	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	VOLTS
Maximum RMS voltage	$V_{RMS}$	14	21	28	VOLTS
Maximum DC blocking voltage	$V_{DC}$	20	30	40	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_L=95^\circ\text{C}$	$I_{(AV)}$		3.0		Amps
Peak forward surge current					
8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$		80.0		Amps
Maximum instantaneous forward voltage at 3.0A	$V_F$	0.475	0.500	0.525	Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	$I_R$		2.0		mA
			40.0		
Typical junction capacitance (NOTE 1)	$C_J$		300.0		pF
Typical thermal resistance (NOTE 2)	$R_{qJA}$		40.0		°C/W
Operating junction and storage temperature range	$T_J, T_{STG}$		-65 to +125		°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

## RATINGS AND CHARACTERISTIC CURVES 1N5820 THRU 1N5822

FIG. 1- FORWARD CURRENT DERATING CURVE

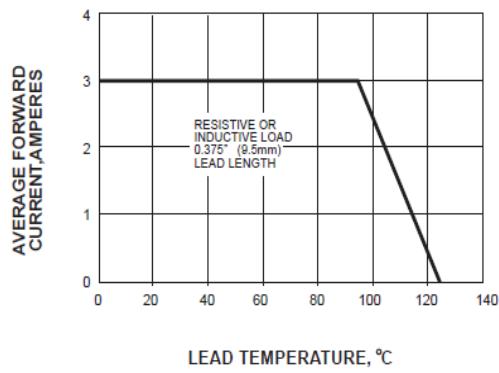


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

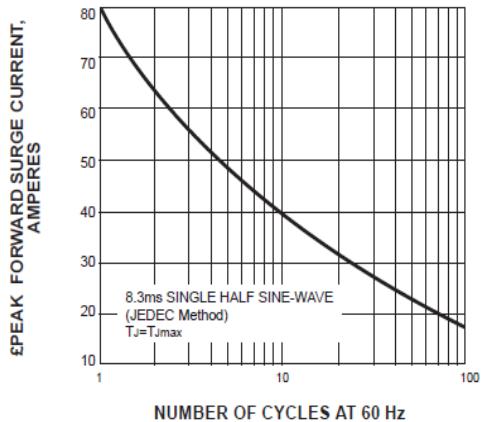


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

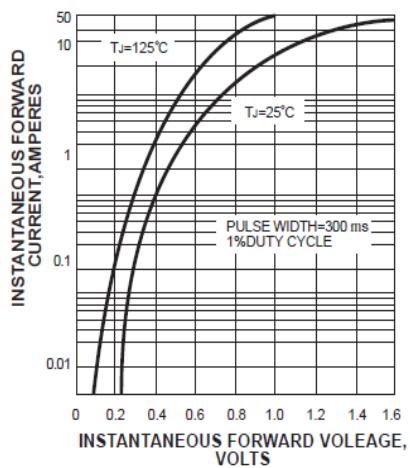


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

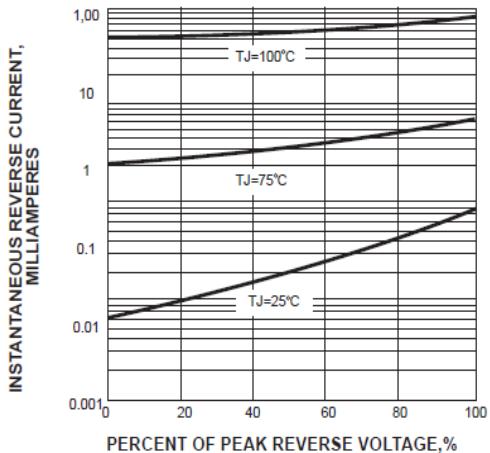


FIG. 5-TYPICAL JUNCTION CAPACITANCE

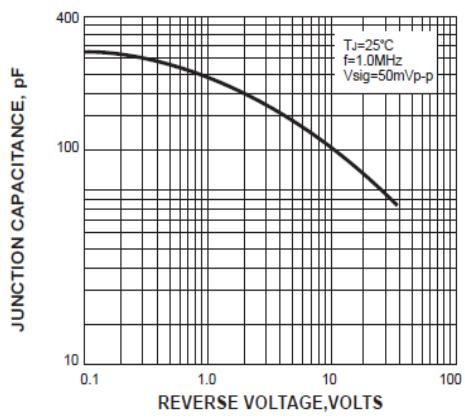


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

