


HER601 THRU HER608

HIGH EFFICIENCY RECTIFIERS

Reverse Voltage - 50 to 1000 Volts Forward Current - 6.0 Amperes

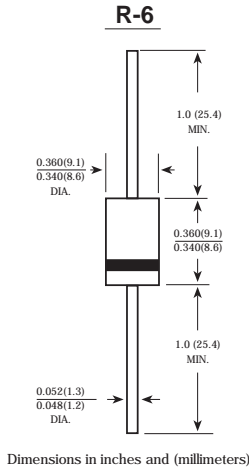

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ High speed switching for high efficiency
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: R-6 molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.072 ounce, 2.05 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

| | SYMBOLS | HER 601 | HER 602 | HER 603 | HER 604 | HER 605 | HER 606 | HER 607 | HER 608 | UNITS |
|---|-----------------|---------------|---------|---------|---------|---------|---------|---------|---------|--------------------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | 1000 | VOLTS |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 210 | 280 | 420 | 560 | 700 | VOLTS |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 300 | 400 | 600 | 800 | 1000 | VOLTS |
| Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=50^\circ\text{C}$ | $I_{(AV)}$ | 6.0 | | | | | | | | Amps |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I_{FSM} | 300.0 | | | | | 200.0 | | | Amps |
| Maximum instantaneous forward voltage at 6.0A | V_F | 1.0 | | 1.3 | | 1.70 | | | Volts | |
| Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$ | I_R | 10.0 200.0 | | | | | | | | mA |
| Maximum reverse recovery time (NOTE 1) | t_{rr} | 50 | | | | | 70 | | | ns |
| Typical junction capacitance (NOTE 2) | C_J | 100.0 | | | | | 65.0 | | | pF |
| Typical thermal resistance (NOTE 3) | $R_{\theta JA}$ | 10.0 | | | | | | | | $^\circ\text{C/W}$ |
| Operating junction and storage temperature range | T_J, T_{STG} | -65 to +150 | | | | | | | | $^\circ\text{C}$ |

Note: 1. Reverse recovery condition $I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES HER601 THRU HER608

