


# SR120 THRU SR1A0

## SCHOTTKY BARRIER RECTIFIER

**Reverse Voltage - 20 to 100 Volts    Forward Current - 1.0 Ampere**

### DO-41

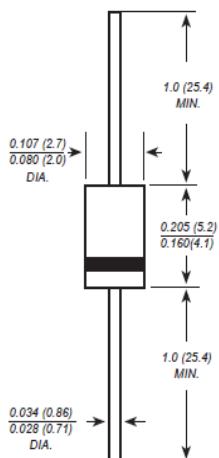

Dimensions in inches and (millimeters)

### FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length,  
5 lbs. (2.3kg) tension

### MECHANICAL DATA

**Case:** JEDEC DO-41 molded plastic body

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.012 ounce, 0.33 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	SR 120	SR 130	SR 140	SR 150	SR 160	SR 170	SR 180	SR 190	SR 1A0	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	70	80	90	100	VOLTS
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	49	56	63	70	VOLTS
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	70	80	90	100	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length(see fig.1)	I <sub>(AV)</sub>										Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>										Amps
Maximum instantaneous forward voltage at 1.0A	V <sub>F</sub>		0.55	0.70	0.85						Volts
Maximum DC reverse current    TA=25°C at rated DC blocking voltage    TA=100°C	I <sub>R</sub>				1.0						mA
					10.0						
Typical junction capacitance (NOTE 1)	C <sub>J</sub>	110			80						pF
Typical thermal resistance (NOTE 2)	R <sub>qJA</sub>			50.0							°C/W
Operating junction temperature range	T <sub>J</sub>	-65 to +125			-65 to +150						°C
Storage temperature range	T <sub>STG</sub>				-65 to +150						°C

Note:1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

## RATINGS AND CHARACTERISTIC CURVES SR120 THRU SR1A0

