


SR1520C THRU SR15A0C

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 100 Volts Forward Current - 15.0 Amperes

TO-220AB

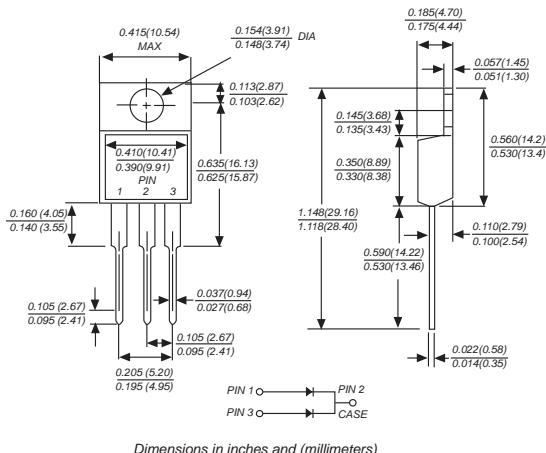

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 260°C, 0.25" (6.35mm) from case for 10 seconds

MECHANICAL DATA

Case: TO-220AB molded plastic body

Terminals: Leads solderable per MIL-STD-750, Method 2026

Polarity: As marked

Mounting Position: Any

Weight: 0.080 ounce, 2.24 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


	SYMBOLS	SR 1520C	SR 1530C	SR 1540C	SR 1545C	SR 1550C	SR 1560C	SR 1570C	SR 1580C	SR 1590C	SR 15A0C	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	45	50	60	70	80	90	100	VOLTS
Maximum RMS voltage	V _{RMS}	14	21	28	32	35	42	49	56	63	70	VOLTS
Maximum DC blocking voltage	V _{DC}	20	30	40	45	50	60	70	80	90	100	VOLTS
Maximum average forward rectified current (see fig.1)	I _(AV)	15.0									Amps	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	150.0									Amps	
Maximum instantaneous forward voltage at 7.5A	V _F	0.55			0.75			0.85			Volts	
Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=100°C	I _R	1.0									mA	
Typical junction capacitance (NOTE 1)	C _J	300			250			pF			pF	
Typical thermal resistance (NOTE 2)	R _{θJC}	2.0									°C/W	
Operating junction temperature range	T _J	-65 to +125			-65 to +150			°C			°C	
Storage temperature range	T _{STG}	-65 to +150									°C	

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.


2. Thermal resistance from junction to case

RATINGS AND CHARACTERISTIC CURVES SR1520C THRU SR15A0C


AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

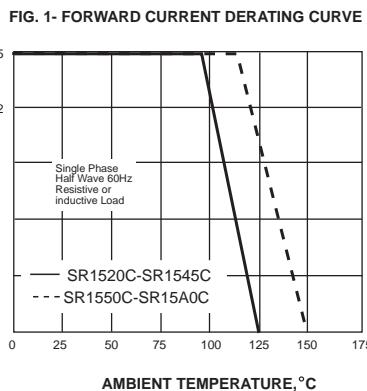


PEAK FORWARD SURGE CURRENT,
AMPERES

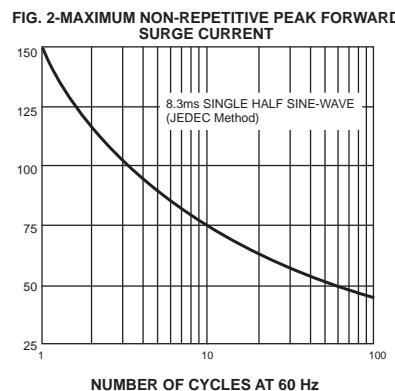


INSTANTANEOUS FORWARD
CURRENT,AMPERES

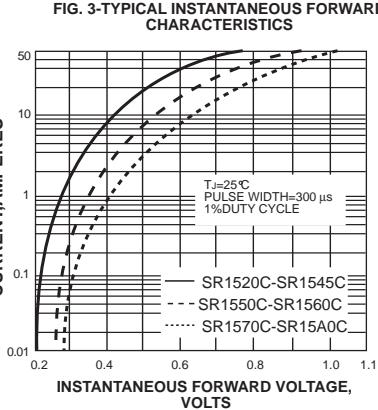


INSTANTANEOUS REVERSE CURRENT,
MILLIAMPERES

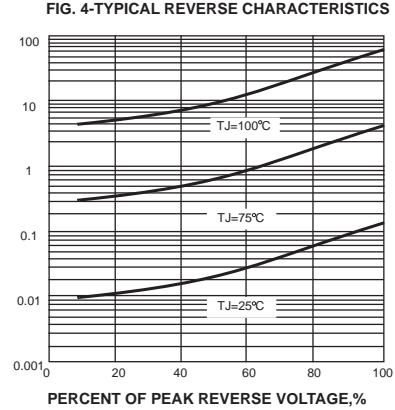

JUNCTION CAPACITANCE, pF

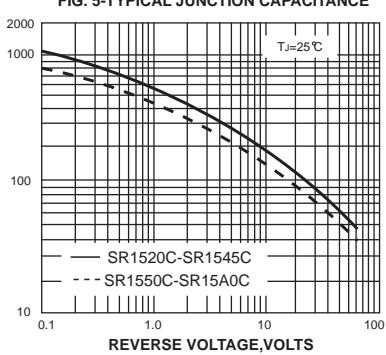

TRANSIENT THERMAL IMPEDANCE,
°C/W

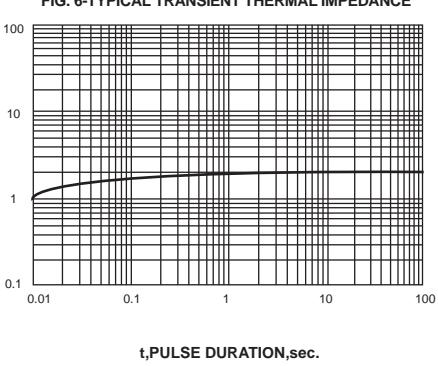

t,PULSE DURATION,sec.